



Top Performance Cartridges




Oil Separator Cartridge (OSC)



EconX® Oil Separator Cartridge

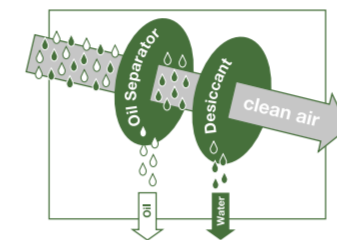

Conventional Cartridge

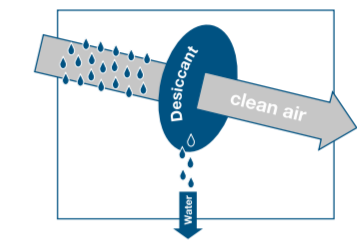

Cartridge Features

Aerosol separation performance	+++	+++ / ++	
Oil separation performance	+++	+++ / ++	+
Particle separation performance	+++	+++ / ++	++
Drying performance	+++	++	++
Recommended service interval	Normal Air Consumption High Air Consumption	up to 36 months up to 24 months	up to 12 months up to 12 months
Max. operating pressure	14 bar	14 bar	14 bar 20 bar: Maximum operating pressure (II38789F004)
Vehicle application technology	High-end mechatronic vehicle systems Mechatronic vehicle systems Pneumatic vehicle systems	High-end mechatronic vehicle systems Mechatronic vehicle systems Pneumatic vehicle systems	Pneumatic vehicle systems
M39x1.5 Standard height (165 mm)	K039454	K039454X00	II40100F K001185 Low temperature (-45°C)
M39x1.5 Standard height (165 mm) Left-hand thread	K039453 K137956K50	K039453X00 K137956X50	
M41x1.5 Standard height (165 mm)	K039455	K039455X00	
M41x2.0 Standard height (165 mm)	K102196		
M41x1.5 Reduced height (135 mm)			II41300F
M42x1.5 Standard height (165 mm)	K147320 Maximum operating pressure 20 bar		II38789F004 Maximum operating pressure 20 bar
G 1 1/4 Height with hexagon nut (178 mm) SW 30		K115979X00	K087957
M39x1.5 Height with hexagon nut (178 mm) DAF small sealing ring SW 30	K096383		
Cartridge insert for bayonet application including main sieve	K096837K50		



KEEP IT RUNNING

For more information please visit: www.knorr-bremseCVS.com

TRUCKSERVICES

